


Speakers with four feet.

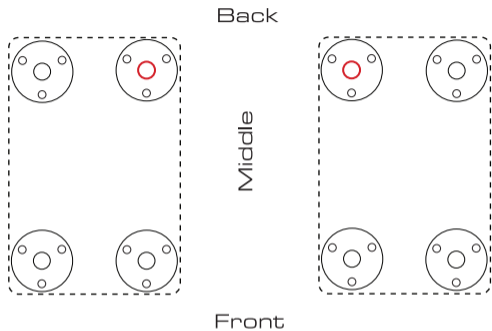

When installing MiG SRX Speaker footer on a speaker with four feet, the MiG SRX Speaker Footer with a red circle will be placed in the rear, inner position relative to the three MiG SRX Speaker footers without the red circle.

MiG SRX

SPEAKER FOOTER



MiG SRX Speaker Footer Installation Instructions

Use the Correct Threaded Adapters - Use only the correct size threaded adapters for your speakers. If unsure, contact your speaker manufacturer.

Avoid Crossthreading - Carefully thread each adapter straight into the speaker. Crossthreading can damage both the speaker and the MiG SRX footer.

Pre-Install the Adapters - Thread the adapters into the speaker base finger-tight only. Do not overtighten.

Use Two People When Needed - Once the adapters are installed and the speaker is secure, have one person gently tilt the speaker back just enough to remove the existing footers and install the MiG SRX footers.

Install the MiG SRX Footers - Hold the MiG SRX footer at a slight angle so the three tungsten balls sit in the three dimples on the footer body.


Slowly insert and rotate the footer until the balls are firmly captured between the footer and the speaker base.

If the Stainless Steel Cone Unthreads - If the cone separates from the footer body, align the three small domes with the internal threads and twist while pressing upward until the cone seats correctly. It should no longer spin freely and should have a small amount of vertical play.

Questions? Contact us - 949-476-0000 or service3@synergisticresearch.com



Speakers with three feet.

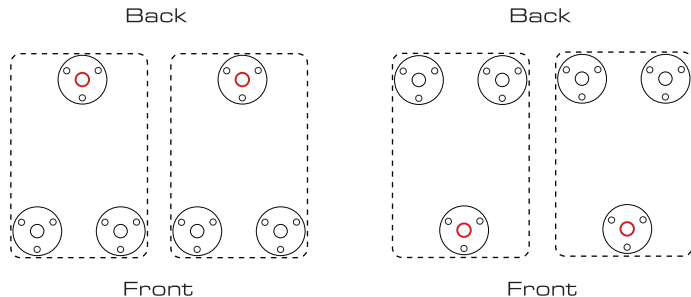

When installing MiG SRX Speaker Footers on a speaker with three feet, install the MiG SRX footer with the red circle opposite the pair of MiG SRX footers without the red circle (front-to-back alignment).

